


Electrical Properties:

1. It shall not have any open/short, miswiring and intermittent failures .
2. The cable shall be 100% electrical test .
3. Voltage test: DC 300V; Insulation resistance: 5.0M ohm/Min; Conductance resistance: 5.0 ohm/Max .

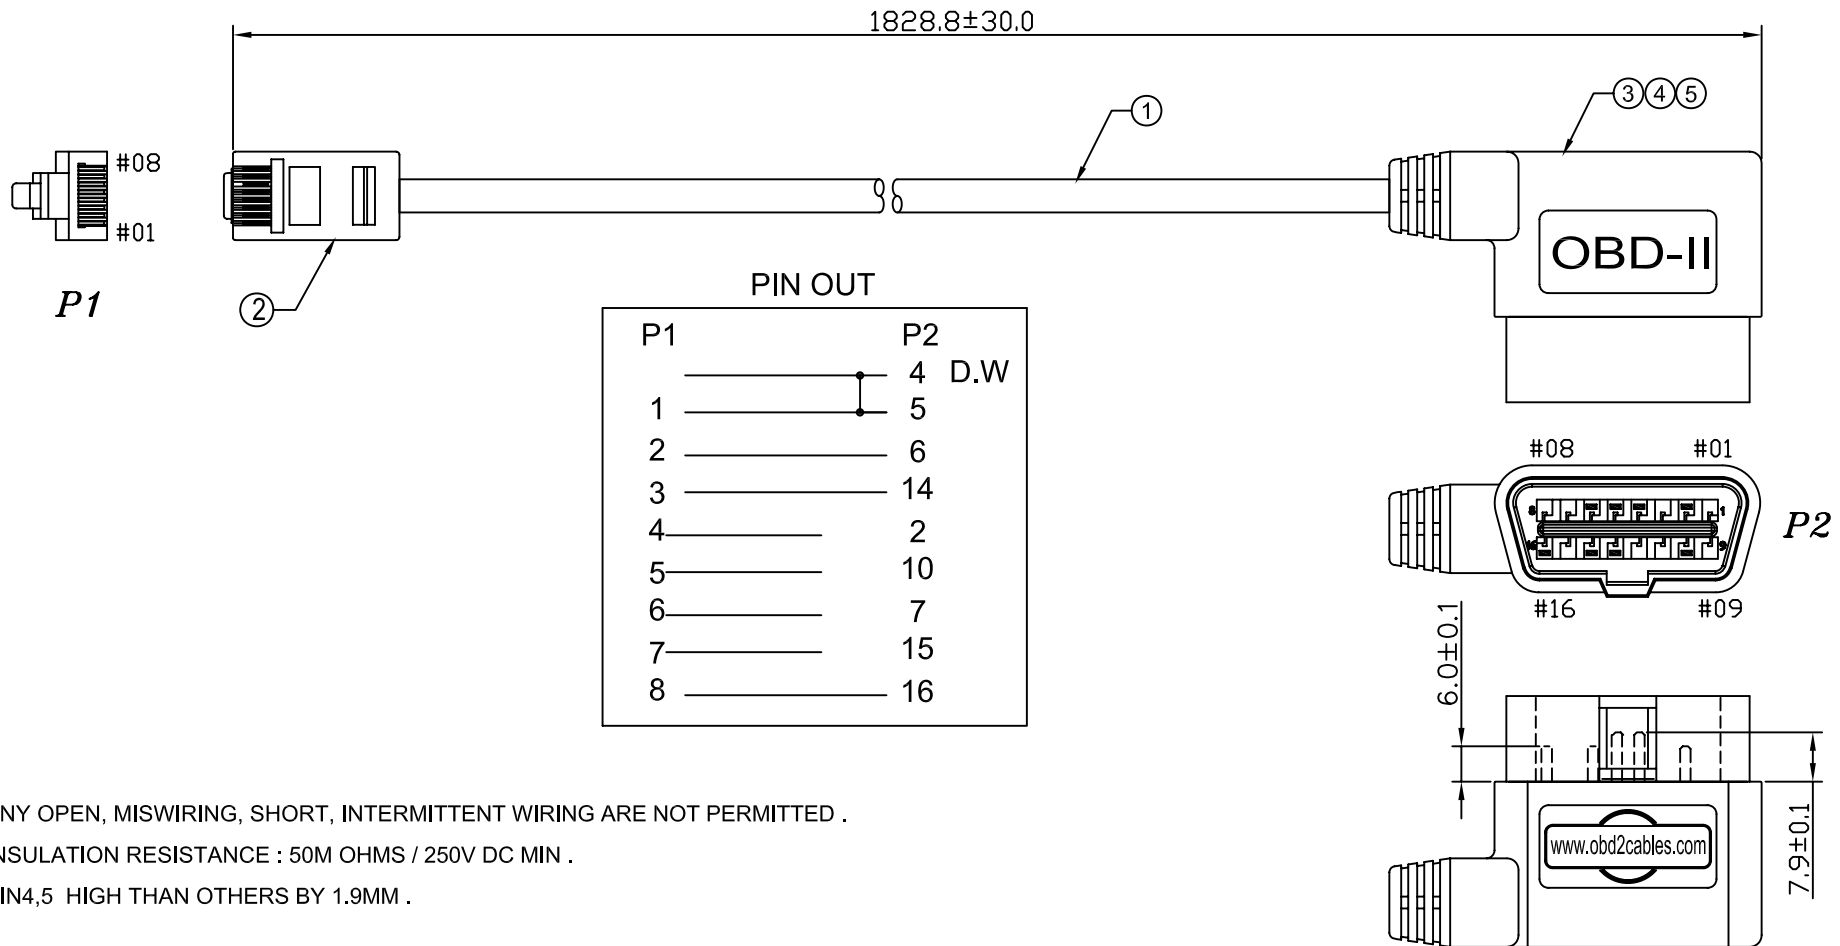

1. ANY OPEN, MISWIRING, SHORT, INTERMITTENT WIRING ARE NOT PERMITTED .
2. INSULATION RESISTANCE : 50M OHMS / 250V DC MIN .
3. PIN4,5 HIGH THAN OTHERS BY 1.9MM .

Item	DESCRIPTION	UNIT	QTY
5	Delphi pin . packard 12047581 .	PCS	8
4	Outer Molded : 45P PVC , Color : Black .	G	45
3	P2 conn : OBD-IIA , NYLON 66+15% Glass fibre , UL94V-0 .BLACK .	PCS	1
2	P1 Conn: RJ45 8P8C Plug, Pin gold 3U" .	PCS	1
1	Cable: UL2725 26AWG(7/0.16TC)*8C+AL/MY+D.W, OD=5.0±0.1mm, Jacket color: black .	MM	

X ±	X° ±	OBD2CABLES.COM	
.X ±	.X° ±	UNITS: MM	PART NO.: 146601
.XX ±	.XX° ±		© Copyright 2008
		SCALE SHEET REV.	
		Property of OBD2Cables.com, cannot be used or reproduced without permission.	