


- ① ANY OPEN, MISWIRING, SHORT, INTERMITTENT WIRING ARE NOT PERMITTED .
- ② INSULATION RESISTANCE : 50M OHMS / 250V DC MIN .
- ③ EMPTY PIN1,3,8,9,11,12,13 . AND PIN4,5 HIGH THAN OTHERS BY 1.9MM .

PIN OUT

P1	P2
1	5
2	4
3	6
4	7
5	14
6	10
7	2
8	15
9	16

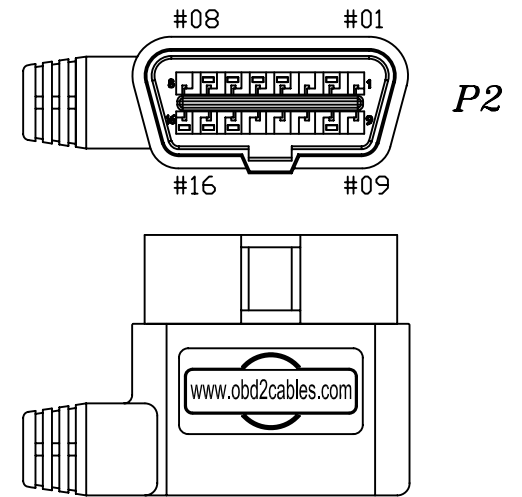

ITEM	DESCRIPTION
7	Inner Molded : PVC , Color : Black .
6	Delphi pin . packard 12047581 .
5	Outer Molded : 45P PVC , Color : Black .
4	SCREWS : 4.0*30.5MM(4-40UNC) , MOLDED BLACK .
3	P2 conn : OBD-IIA , NYLON 66+15% Glass fibre , UL94V-0 .BLACK .
2	P1 conn : DB 9Pin female , Solder type , Inside Black . WITH "UL,CSA"
1	Cable: UL2464 24AWG(7/0.20TC)*9C+AL/MY+D.W OD=5.6±0.15mm, Jacket color: Black .

X ±	X' ±	OBD2CABLES.COM		
.X ±	.X' ±			
.XX ±	.XX' ±	UNITS	PART NO.	© Copyright 2008
		MM	142201	
				SCALE
Property of OBD2Cables.com, cannot be used or reproduced without permission.				