


- 1. ANY OPEN, MISWIRING & SHORT & INTERMITTENT ARE NOT PERMITTED.
- 2. INSULATION RESISTANCE : 50 OHMS / 250V DC MIN.
- 3. PIN 4,5 HIGH THAN OTHERS 1.9MM.

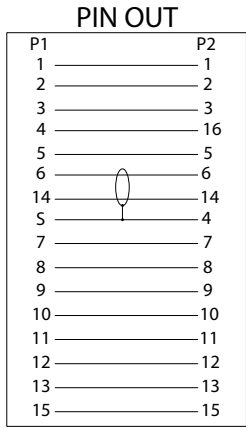

7	Delphi pin.
6	Outer Molded : 45P PVC, Color : BLUE PANTONE 293C.
5	Outer Molded : 45P PVC, Color : BLACK.
4	SCREWS : 4.0*30.5MM (4-4 OUNC), MOLDED BLACK.
3	P2 conn: OBD-II 16PIN, NYLON 66 UL94V-0. BLACK.
2	P1 conn: DB15PIN, male, solder type, inside black.
1	Cable: UL2725 (26AWG*1P+AL/MY+D.W)+26AWG*13C+ PAPER, OD=6.5±0.1mm, Jacket color: Black.
ITEM	DESCRIPTION

X±	X°±	NAME:	OBD2CABLES.COM							
.X±	.X°±	W1								
.XX±	.XX°±	UNITS:	PART NO.:	© Copyright 2008						
		mm	143801							
		<table border="1"> <thead> <tr> <th>SCALE</th> <th>SHEET</th> <th>REV.</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>			SCALE	SHEET	REV.			
		SCALE	SHEET	REV.						
Property of OBD2Cables.com, cannot be used or reproduced without permission.										