



P1

PIN OUT

P1	P2	P1	P1
1	1	8	8
2	2	9	9
10	10	11	11
3	3	12	12
5	5	13	13
6	6	15	15
14	14	16	16
7	7	4	4

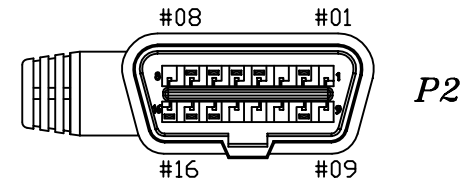

P2

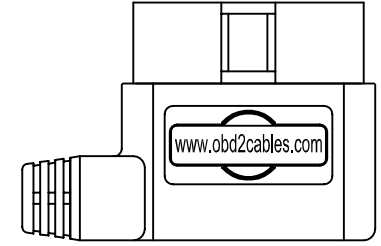

- ⚠️ PIN4,5 HIGH THAN OTHERS BY 1.9MM .
- ⚠️ INSULATION RESISTANCE : 50M OHMS / 250V DC MIN .
- ⚠️ ANY OPEN, MISWIRING, SHORT, INTERMITTENT WIRING ARE NOT PERMITTED .

5	Delphi pin .	PCS	16
4	Outer molded : 45P PVC , Color : Black .	KG	
3	P2 Conn: OBD-II 16P male , Nylon66 UL94V-0 , black .	PCS	1
2	P1 Conn: OBD F with lock, Nylon 66+15% Glass fibre, UL94V-0, Black.	PCS	1
1	CABLE : UL2464 24AWG(7/0.20TC)*2Pairs+24AWG*11C +AL/MY+D.W , Jacket color: Black. OD=7.0mm .	MM	
Item	DESCRIPTION	UNIT	QTY

X ±	X° ±	OBD2CABLES.COM		
.X ±	.X° ±			
.XX ±	.XX° ±	UNITS	PART NO.	© Copyright 2008
		MM	144301	
		Property of OBD2Cables.com, cannot be used or reproduced without permission.		

SCALE SHEET REV.